


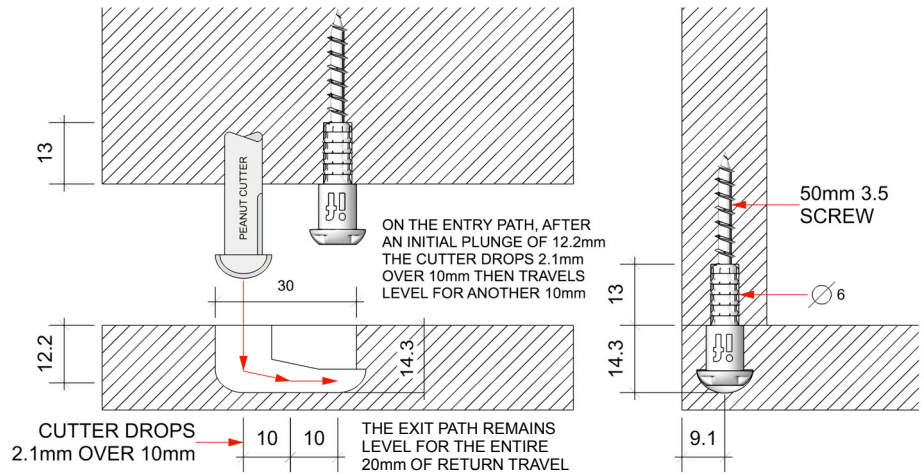
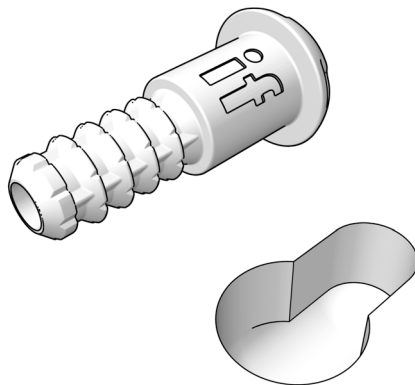
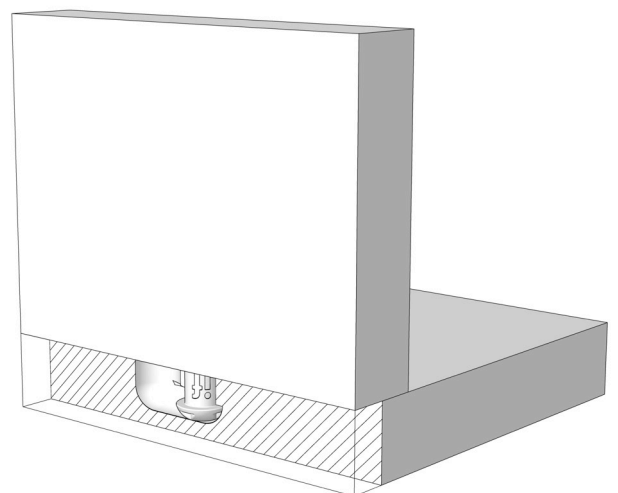


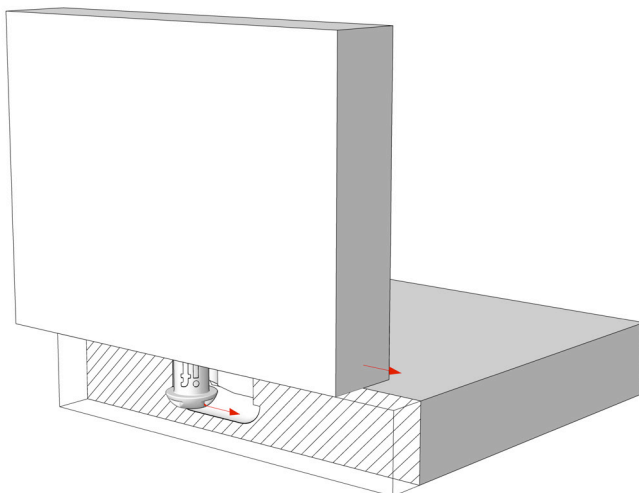

Machining

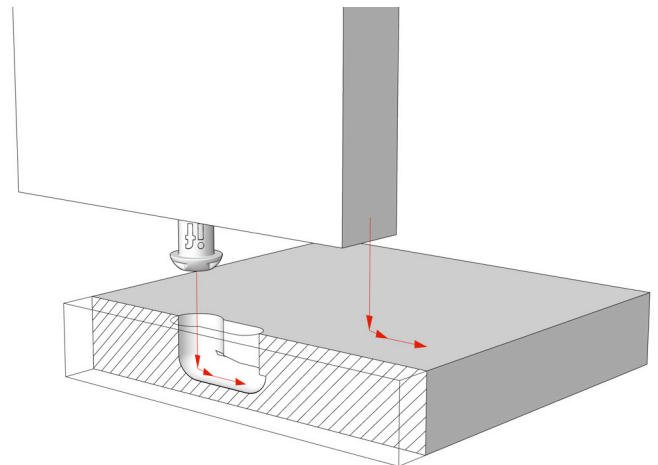


Assembly

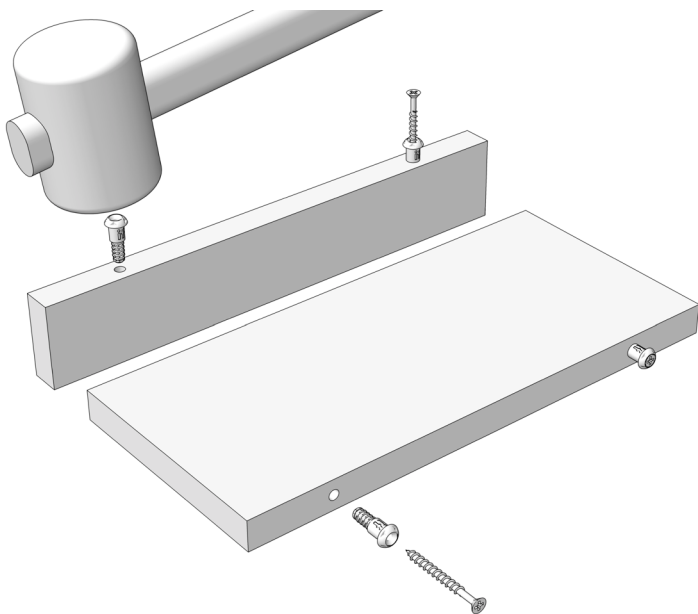



Applications

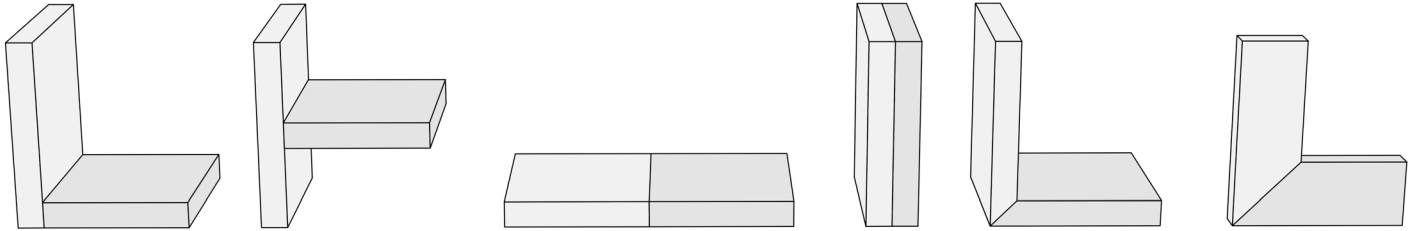

Technical Specifications

PEANUT® 2 Technical data

COMPONENT COMPOSITION	GLASS-FIBRE REINFORCED PLAST
MATERIAL THICKNESS	>15.3MM
TOLERANCE (PEANUT® CUTTER SLOT)	+0.3mm and -0.4mm (DEPTH)

Strength Data

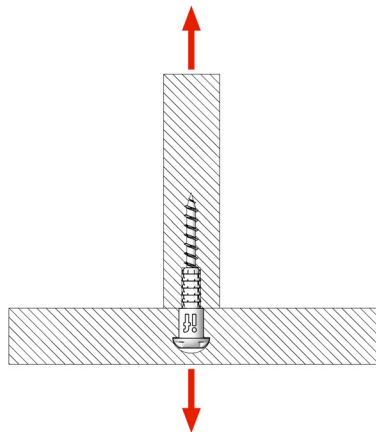


Fig. A

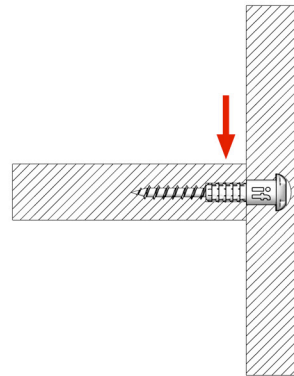


Fig. B

PEANUT® 2 Tensile strength (based on 1 component):

TESTED BY:



MATERIAL	TENSILE STRENGTH (Fig. A)
PARTICLE BOARD (18mm MFC) from EGGER	900 N / 90 KG (1 COMPONENT)
MDF (18mm)	1000 N / 100 KG (1 COMPONENT)

PEANUT® 2 Shear strength (based on 2 component):

TESTED BY:



MATERIAL	SHEAR STRENGTH (Fig. B)
PARTICLE BOARD (18mm MFC) from EGGER	1100 N / 110 KG (2 COMPONENTS)
MDF (18mm)	1300 N / 130 KG (2 COMPONENTS)

PLEASE NOTE THAT THE STRENGTH MAY VARY DEPENDING ON MATERIAL AND QUALITY OF MATERIAL USED.