

Pen Assembly Press Instructions

Code: 108502


Important!

Straight out of the box, the handle of this press needs to be re-positioned.

Before use:

- Remove handle screw "A"
- Lift handle as shown
- Re-install handle screw.

Operating in Wrong position voids warranty.

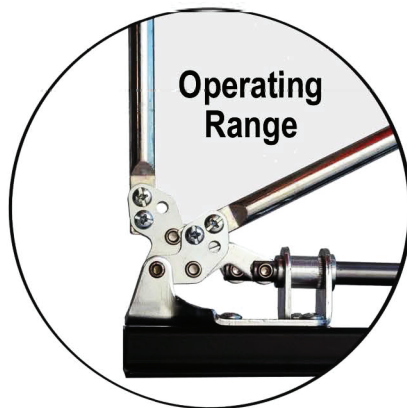

Caution:

- For reliable operation, only apply force in Operating Range.
- Project tube **MUST** be clean of all glue residue before attempting assembly.
- Ensure tube ends are free of damage or burrs and align parts well when assembling.
- Precision alignment of micro-adjust pad is made by loosening four mounting screws.
- Service sliding and pivoting points with light oil. Periodically tighten all screws.
- For assembling commercially available pen kits. NOT for DIY bullet pens.

