

# Guide for fitting the Fence Upgrade for AP2920B Bandsaw

The Rip fence for the AP2920B Bandsaw has been upgraded to a T-style fence.


Below are the instructions for squaring to the table and aligning to the blade.

## Aligning the fence to the blade


1. Ensure that the table aligning instruction has been followed on page 11 of the manual.
2. Place the fence on the machine & slide it over to the mitre fence slot. **FIG. 2**



3. To align the fence to the blade/mitre fence slot the fence has been fitted with 2 grub screws that can be located here. **FIG. 3**

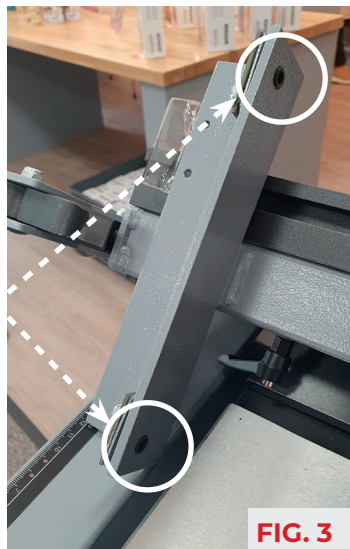

4. Slide the fence over to the mitre fence slot and check for alignment, if the fence seems out of line to the slot, then adjustments can be made by winding either grub screw in or out. **FIG. 4**

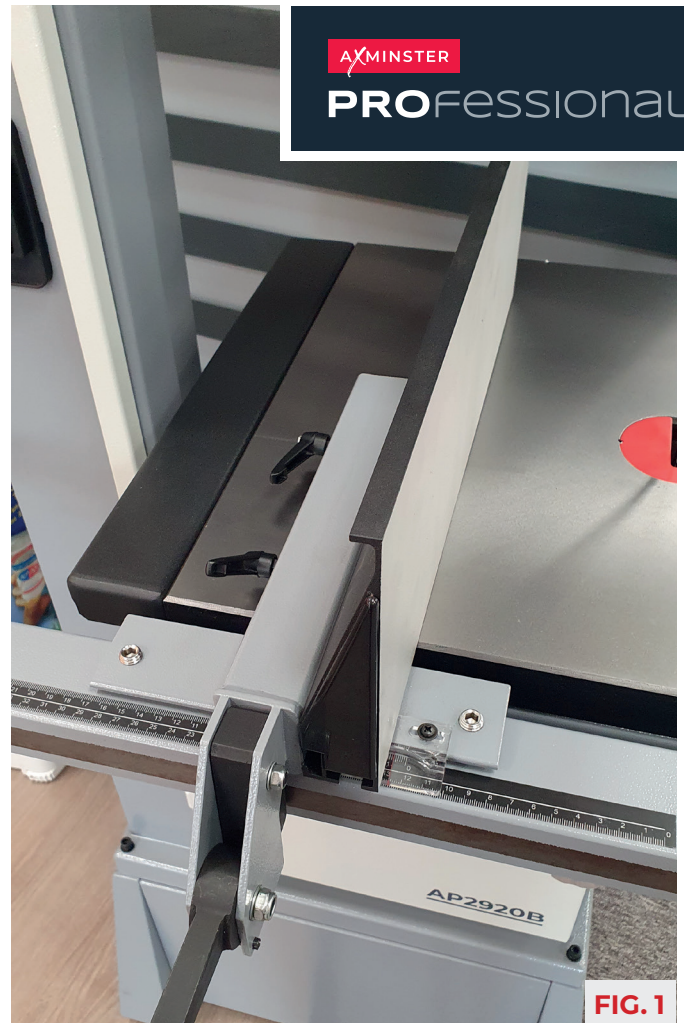

## Squaring the fence to the table

5. Ensure that the "squaring the table to the blade" instruction has been followed on page 12 of the manual." Place the fence on the machine & slide it over then lock it off around 100 – 150mm from the blade, check for square with the fence in its high position. **FIG. 1**



6. If the fence seems out of square to the table, then adjustment can be made by firstly unlocking the fence then winding the 2 nylon grub screws in or out. Adjust, relock then recheck for square, adjust again if needed. **FIGS. 5 & 6**