

PROJECT PEN KITS



For more info and videos scan here

AXMINSTER

woodturning

Americana Classic Twist Pen Kit - 24kt Gold

Code: 310432



WHAT'S REQUIRED

Bushing Set:
310383

Drill Bit Size:
8.7 mm (11/32")

Minimum Blank Size:
19 mm x 19 mm x 125 mm

PREPARING THE BLANKS, HINTS & TIPS

Preparing a wooden or acrylic/polyester blank for a pen mandrel.

Note: The shorter tube is the lower half of the pen, the longer tube the upper half.

1. Cut a blank to the length of each tube plus approximately 2.5mm to allow for trimming and squaring off the ends.
2. Mark the centre on the end of the blank.
3. Using the recommended drill bit, drill a hole lengthwise through the blank.
4. Apply epoxy glue, Polyurethane glue or gap filling cyanoacrylate (super glue) to the tubes.
5. Insert the tube into the blank with a twisting motion to spread the glue evenly inside the hole.

6. Centre the tube lengthwise inside the blank.
7. Allow the adhesive to cure.
8. When cured, square the ends of the blank. Using a barrel trimmer with a guide matching the inner diameter of the tube or a universal pen blank squaring jig with a disc sander.
9. Take the excess material down flush with the ends of the brass tube. (do not trim beyond the length of the tube since this may interfere with operation of the mechanism and assembly).

Tips/Hints

- If using a wooden blank, draw a short pencil line lengthwise across the centre of the blank. This will help maintain grain alignment when mounting the blanks onto a mandrel.
- Excessive pressure may cause the drill bit to wander and/or split the blank. Slow the feed rate and back the drill bit out repeatedly for chip removal.
- Roughen the brass tube slightly with abrasive for better adhesion.
- Certain acrylic blanks are more transparent than others, especially lighter colors or blanks with light colored swirls. To avoid the risk of the brass tube showing through the pen blank, paint the tubes white or black before gluing them in.
- The barrel trimmer guide also cleans any adhesive that may have gotten inside of the tube.

TURNING THE BLANK, HINTS & TIPS

1. Mount the bushings and blanks onto a pen mandrel according to the diagram (If using a wooden blank, check the grain alignment).
2. Secure the bushings and blanks onto the mandrel.
3. Slide the tailstock with a live centre into place against the mandrel and lock in position. This is for support; only slight pressure is required.
4. Using sharp tools, turn the blanks down

to become the Upper Pen Barrel and Lower Pen Barrel with profiles of your choice.

5. Turn the blanks very slightly oversize, then sand and polish the ends down to the same diameter as the bushings.
6. Using successively finer abrasives gradually sand and polish both Pen Barrels.
7. Finish both Pen Barrels with your preferred choice of polish.

Tips/Hints

- Don't be afraid to sharpen frequently especially when turning acrylics.



Continues over...

ASSEMBLY, HINTS & TIPS

1. Layout parts according to diagram A, ensuring the turned Pen Barrels are the same orientation as when mounted on the mandrel.

Note: When removing the blanks from the mandrel, use a felt tip pen to mark the inside of each tube where they join to maintain the grain or pattern alignment.

2. Unscrew the Nib Assembly from the Nib Coupler

3. Press the Nib Coupler into the bottom of the (short) Lower Pen Barrel.

4. Align the Centre Coupler with the top of the (short) Lower Pen Barrel and firmly press together.

5. Slide the Clip onto the Twist Mechanism Retainer then press into the top of the (long) Upper Pen Barrel.

6. Carefully check grain orientation and press the Upper & Lower Pen Barrels together.

7. Push (by hand) the silver end of the Twist Mechanism into the End Cap until full home.

8. Carefully press the brass end of the Twist Mechanism into the Twist Mechanism Retainer.

9. Remove the End Cap.

10. Slide the Spring onto the Refill.

11. Insert the Refill and Spring into the assembled pen body and push into the twist mechanism.

12. Overcome the spring pressure and screw the Nib assembly onto the Nib Coupler.

13. Actuate the Twist Mechanism to determine how far the Refill point extends beyond the Tip Assembly.


14. If the pen refill does not extend far enough, remove the Refill and press the Twist Mechanism in a little deeper. Be Careful not to press it in too far.

15. Push the End Cap by hand, back over the exposed part of the Twist Mechanism to complete the pen.

Tips/Hints

- Use a woodworking vice, one handed bar clamp, arbor press or a dedicated pen press.
- Press parts together slowly and steadily
- When pressing the parts together, CHECK the parts are correctly aligned with each other and straight. If the part is crooked or misaligned, it will result in a poor fit or render the pen unuseable.
- When laying out your pen barrel with the parts, pay careful attention to keep the pen barrels in the same orientation as when on the mandrel. i.e. a pen barrel may have a "top" and "bottom", now is the time to be certain of the orientation.

DIAGRAM A

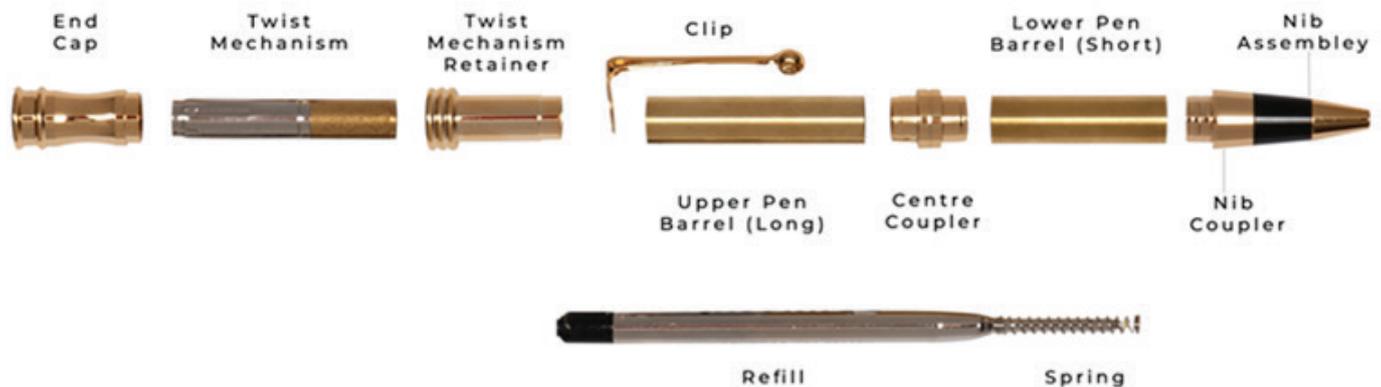

Visit the Knowledge blog 'How To Make A Pen' for hints, tips and videos
knowledge.axminstertools.com/pen-turning



VIEW OUR FULL RANGE OF
PEN CASES AND DISPLAY BOXES ONLINE

Axminster Tools, Axminster, Devon, EX13 5PH

AXMINSTERTOOLS.COM